

HBRL Series

The BRUTE™

Hazardous Location Lighting



SPECIFICATIONS

Voltage	120-277vAC
Wattage	40w / 80w / 105w
Color Temp	3000 / 4000 / 5000 Kelvin
CRI	>80
Housing	Corrosion resistant, marine grade, copper free aluminum
Color	Gray
Lens	Tempered glass tubes
Ambient Temperature	-20°C (-4°F) to 40°C (104°F)
T-Rating	T4
Power Factor	>0.95
Efficacy	105 lm/w
Lifetime	50,000 hrs rated life
Warranty	5 Year Limited Warranty

LUMENS

40w	80w	105w
4,200	8,400	11,000

PRODUCT ORDERING SELECTION

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> U	<input type="checkbox"/>	<input type="checkbox"/>
Series/Length	Watts	Kelvin	Voltage	Mounting Options	Emergency Battery Backup Option
<input type="checkbox"/> HBRL2 (2ft)	<input type="checkbox"/> 040 - 40w	<input type="checkbox"/> 30 - 3000K	<input checked="" type="checkbox"/> U - 120-277vAC	<input type="checkbox"/> SM - Surface Mount (Standard)	<input type="checkbox"/> EMB - Emergency Battery Backup (90 min)
<input type="checkbox"/> HBRL4 (4ft)	<input type="checkbox"/> 080 - 80w	<input type="checkbox"/> 40 - 4000K		<input type="checkbox"/> PM - Pendant Mount	<input type="checkbox"/> WG4 - Wire Guard (4ft models only)
	<input type="checkbox"/> 105 - 105w	<input type="checkbox"/> 50 - 5000K			



5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS




CLASS / DIVISION

- Class I, Div 1, Groups C, D
- Class II, Div 1, Groups E, F
- Class II, Div 2, Groups E, F, G
- Class III

KEY FEATURES AND BENEFITS


- Ambient temperature capabilities: -20°C to 40°C (104°F).
- Corrosion resistant, marine grade, copper free aluminum housing.
- Heavy gauge extruded reflectors with high gloss reflective finish.
- Impact and heat resistant glass tubes.
- Marine and wet location ready.
- Emergency battery backup option available (factory sealed in driver housing).
- Features 3 threaded wiring access points - 90°(up), +45° and -45°.
- Mounts rotate +/- 70°.
- Buy American Act compliant.

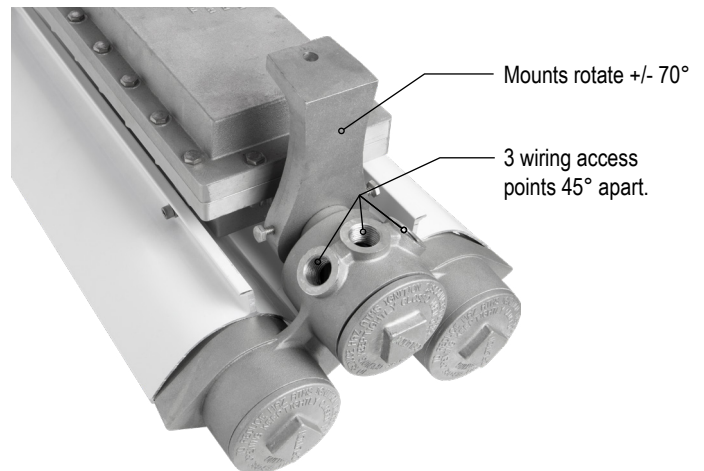

HBRL Series

The BRUTE™

MOUNTING OPTIONS

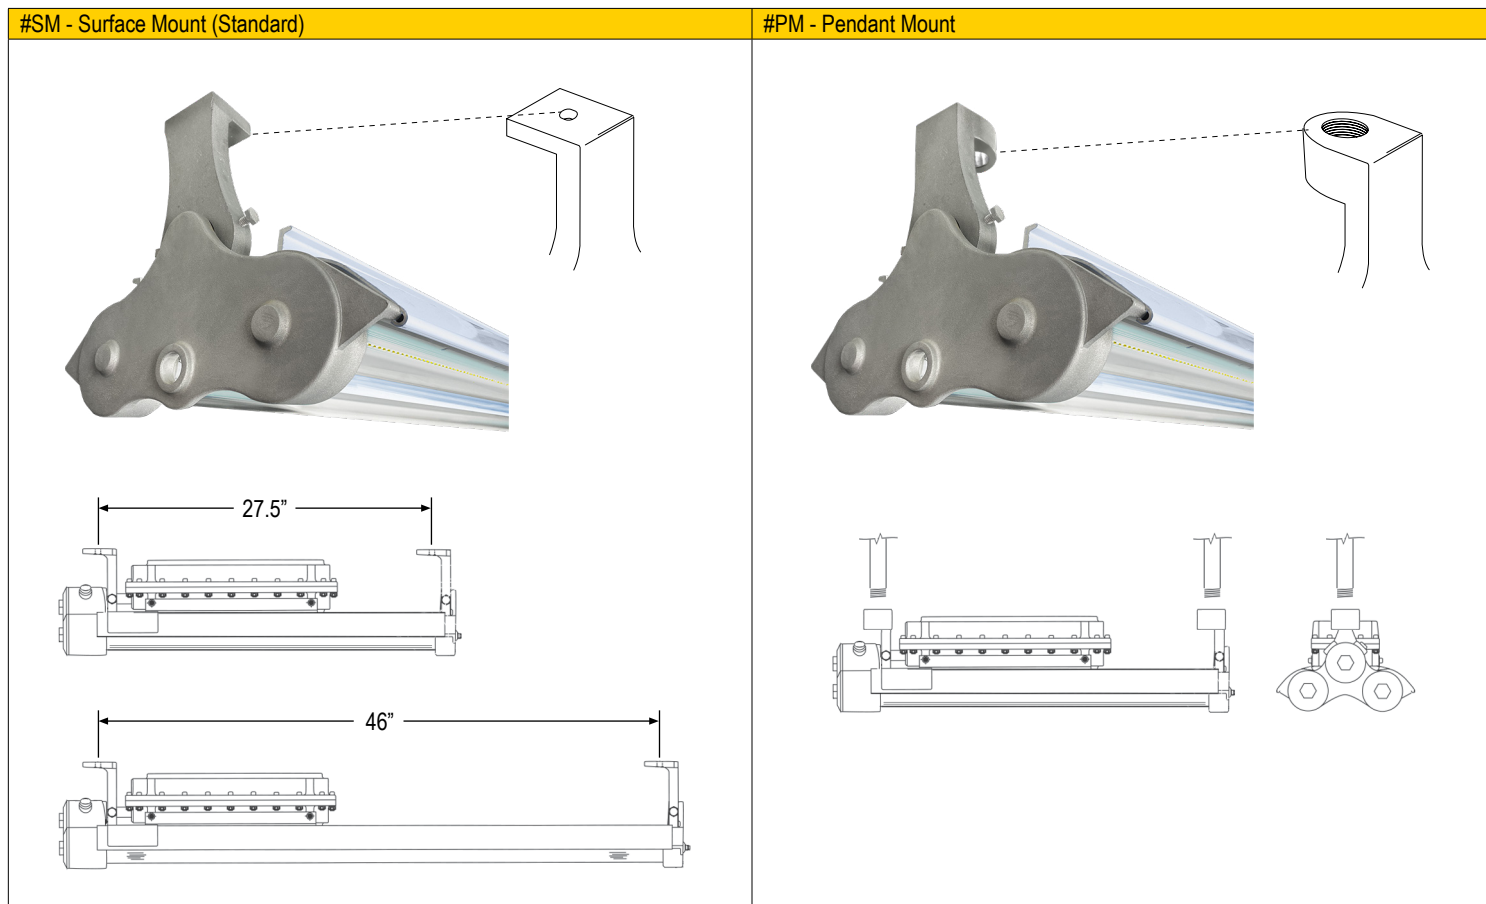


WEIGHTS AND DIMENSIONS

WEIGHTS

2'	4'
50.2 lb	61.3 lb

2' MODELS

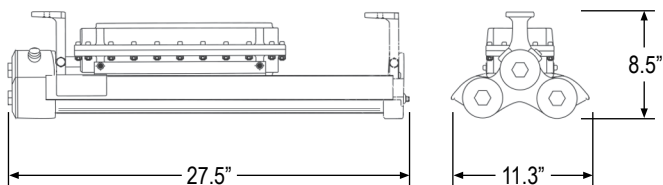

4' MODELS

