


# HKL Series

## The CURATOR™

Hazardous Location LED Lighting



HKL4

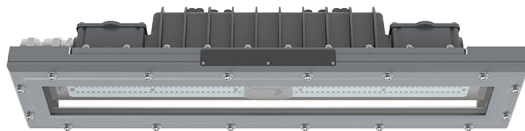

HKL2

High Vibration  
RESISTANCE



5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

Cat. #	Type
Notes	

### CERTIFICATIONS / RATINGS



### CLASS / DIVISION

- Class I, Div 2, Groups A, B, C, D
- Class II, Div 2, Groups F, G

### KEY FEATURES AND BENEFITS

- Low-profile hazardous location rated LED linear lighting.
- Available in 2 ft. and 4 ft. lengths.
- Extreme vibration / anti-resonance design is ideal for bridges, boats & tunnels.
- High impact tolerance, crush resistant housing.
- Corrosion resistant aluminum housing / UL 1598A marine rated.
- Epoxy powder coating.
- Optional wire guard for added impact protection.
- 4kV/6kV built in surge protection.

### SPECIFICATIONS

<b>Voltage</b>	120 - 277 VAC
<b>Wattage</b>	36W / 48W / 56W / 72W / 100W
<b>Color Temp</b>	3000 / 4000 / 5000 / 6000 Kelvin
<b>Housing</b>	Coated copper aluminum
<b>Color</b>	Gray (RAL7040)
<b>Lens</b>	Tempered glass
<b>Lifetime</b>	>50,000 hours
<b>CRI</b>	82 (3000K) / 70 (4000K/5000K/6000K)
<b>Beam Angle</b>	115°
<b>Power Factor</b>	>0.98
<b>Protection</b>	IP66

**Warranty** 5 Year Limited Warranty

### AMBIENT TEMPERATURE / T-RATING

	Ambient Temperature	T-Rating - 2'	T-Rating - 4'
Class I Div 2	-40°C (-40°F) to 45°C (113°F)	T6	T5
	-40°C (-40°F) to 50°C (122°F)	T5	T5
Class II Div 2	-40°C (-40°F) to 45°C (113°F)	T4A	T4A

### LUMENS

Kelvin	36W	48W	56W	72W	100W
HKL2 - 2ft	4,900	6,550	7,650	N/A	N/A
HKL4 - 4ft	4,900	6,550	7,650	9,800	13,650




### PRODUCT ORDERING SELECTION


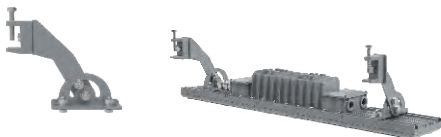
<input type="checkbox"/> HKL2 - 2 ft	<input type="checkbox"/> 036 - 36W <input type="checkbox"/> 048 - 48W <input type="checkbox"/> 056 - 56W	<input type="checkbox"/> 30 - 3000K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K <input type="checkbox"/> 60 - 6000K	<input checked="" type="checkbox"/> U - 120-277 VAC	<input type="checkbox"/> HKBR - Wall/Ceiling Bracket <input type="checkbox"/> HKLO - Hanging Loop <input type="checkbox"/> HKPC - Pipe Clamp <input type="checkbox"/> HKSP - Surface Mount Pivot Bracket <input type="checkbox"/> HKCM - Clamp Mount Pivot Bracket	<input type="checkbox"/> HKU2 - 2' Wire Guard <input type="checkbox"/> HKU4 - 4' Wire Guard
<input type="checkbox"/> HKL4 - 4 ft	<input type="checkbox"/> 036 - 36W <input type="checkbox"/> 048 - 48W <input type="checkbox"/> 056 - 56W <input type="checkbox"/> 072 - 72W <input type="checkbox"/> 100 - 100W				

# HKL Series


## The CURATOR™

### MOUNTING OPTIONS
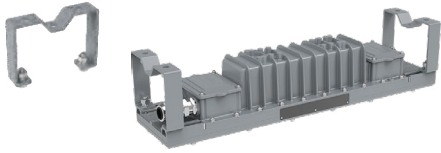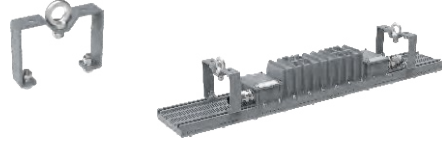
#HKBR - Wall/Ceiling Brackets	#HKLO - Hanging Loops	#HKPC - Pipe Clamps
		 For pipe diameters 40mm - 60mm. Pipe not included.

#HKSP - Surface Mount Pivot Bracket	#HKCM - Clamp Mount Pivot Bracket
	

### OTHER OPTIONS

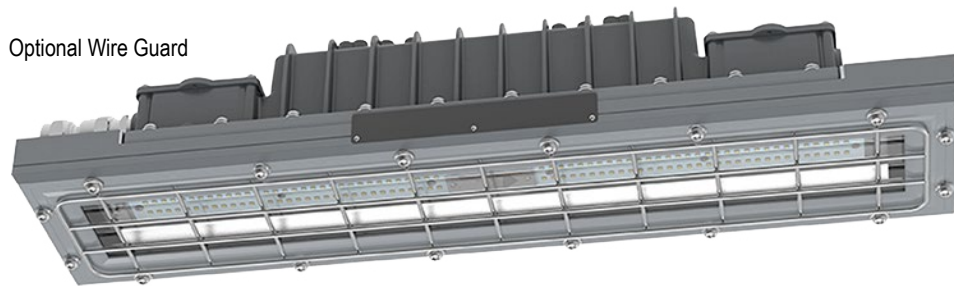

### WEIGHTS AND DIMENSIONS

#### WEIGHTS

Length	lb
HKL2 - 2 foot	15.21 lb
HKL4 - 4 foot	25.35 lb

