

FPS Series

CCT / POWER SELECTABLE

Lay-In Flat Panel LED Lighting

by **RCA** COMMERCIAL ELECTRONICS



5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS




CERTIFIED
UL 1598



KEY FEATURES AND BENEFITS

- Selectable CCT and wattage for perfect lighting.
- 3 color temperature and 3 wattage settings.
- Diffused polycarbonate lens with UV treatment to prevent yellowing over time.
- Sealed to prevent dust entry.
- 0-10v dimming driver standard.
- Damp location approved
- Ultra slim body - 1.77 inches.
- 5 year limited warranty.

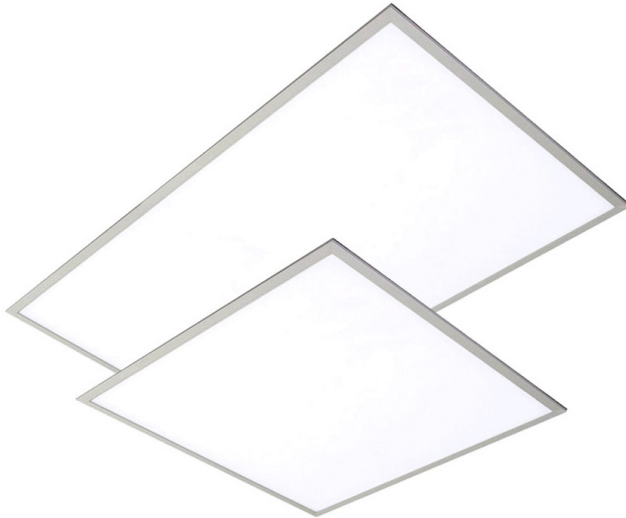

SELECTABLE
WATTAGE / COLOR TEMP



CCT and Wattage
Selector Switches

SPECIFICATIONS

Voltage	120-277 VAC
Wattage	2x2 - 20W / 30W / 40W Selectable 2x4 - 30W / 40W / 50W Selectable
Color Temp	3500 / 4000 / 5000 Kelvin Selectable
Housing	Steel
Color	White
Lens	UV treated frosted polycarbonate
Lifetime	50,000 hrs L ₈₀
Ambient Temperature	-25°C (-14°F) to 45°C (113°F)
Efficacy	140 lm/W
CRI	80+

Beam Angle	110°
Power Factor	>0.95
Protection	IP20
Warranty	5 Year Limited Warranty

LUMENS

2x2			2x4		
20W	30W	40W	30W	40W	50W
2,800	4,200	5,600	4,200	5,600	7,000

PRODUCT ORDERING SELECTION

Part Number	Size	Watts	Kelvin	Lumens	Beam Angle	Options
<input type="checkbox"/> FPS1A1TB1041	2x2	20W / 30W / 40W Selectable	3500K / 4000K / 5000K Selectable	2,800 / 4,200 / 5,600 lm	110°	<input type="checkbox"/> EZJB - Add EZ J-Box For All Fixtures In This Order
<input type="checkbox"/> FPS1A1TB1011	2x4	30W / 40W / 50W Selectable	3500K / 4000K / 5000K Selectable	4,200 / 5,600 / 7,000 lm	110°	


FPS Series

CCT / POWER SELECTABLE

EASY-ACCESS J-BOX OPTION





EARTHQUAKE HOOKS (STANDARD)

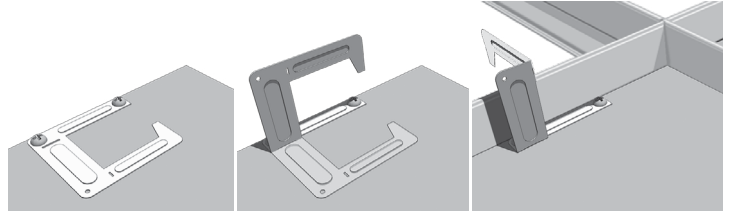

“Earthquake hooks” pre-installed and easily activated for use.

PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

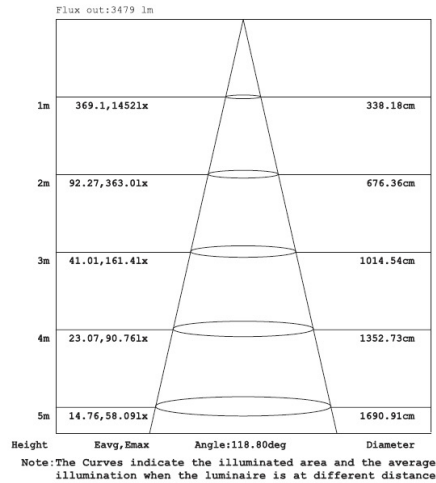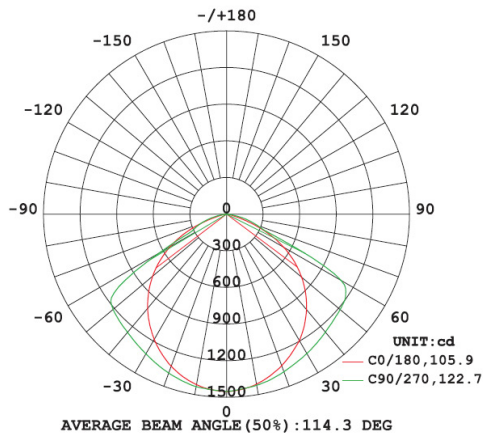

WEIGHTS AND DIMENSIONS

WEIGHTS

2x2	2x4
8 lb	14 lb

