

HJVX Series

Emergency Exit Sign

Hazardous Location LED Lighting



High Vibration
RESISTANCE

| | |
|--------|------|
| Cat. # | Type |
| Notes | |

CERTIFICATIONS / RATINGS



CLASS / DIVISION

- Class I, Div 2, Groups A, B, C, D
- Class II, Div 1, Groups E, F, G
- Class II, Div 2, Groups F, G
- Class III

KEY FEATURES AND BENEFITS

- Compact and heavy duty emergency sign with battery backup.
- Economical single sided design (lettering is reversed on back side).
- 3-hour emergency operation.
- Aluminum housing with tempered glass exit sign.
- Stainless steel exposed fasteners.
- Available with red or green lettering.
- IP66 rating.
- Integrated junction box for driver and emergency battery.
- Low energy consumption.
- High vibration and impact resistance.

SPECIFICATIONS

| | |
|----------------------------|----------------------------|
| Voltage | 100-277 VAC |
| Wattage | 5W |
| Sign Color | Red or Green |
| Housing | Aluminum |
| Sign | Tempered glass |
| Lifetime | 50,000 hrs |
| Ambient Temperature | -20°C(-4°F) to 60°C(140°F) |
| Protection | IP66 |
| Battery Runtime | 180 minutes |
| Warranty | 5 Year Limited Warranty |




Test button located on end-cap.

Aluminum housing with stainless steel external hardware.

PRODUCT ORDERING SELECTION


| | | | | |
|--|--|--|---|--|
| HJVX | 05 | | | |
| Series | Watts | Letter Color | Arrows | Mounting Options |
| <input checked="" type="checkbox"/> HJVX | <input checked="" type="checkbox"/> 05 - 5 Watts | <input type="checkbox"/> R - Red <input type="checkbox"/> G - Green | <input type="checkbox"/> N - None <input type="checkbox"/> B - Both <input type="checkbox"/> L - Left <input type="checkbox"/> R - Right | <input type="checkbox"/> PM - Pendant Mount <input type="checkbox"/> WM - Wall Mount <input type="checkbox"/> SM - Side Pipe Mount |

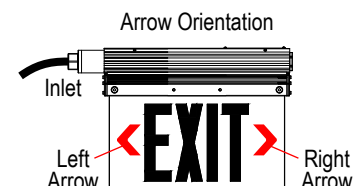

HJVX Series

Emergency Exit Sign

MOUNTING OPTIONS

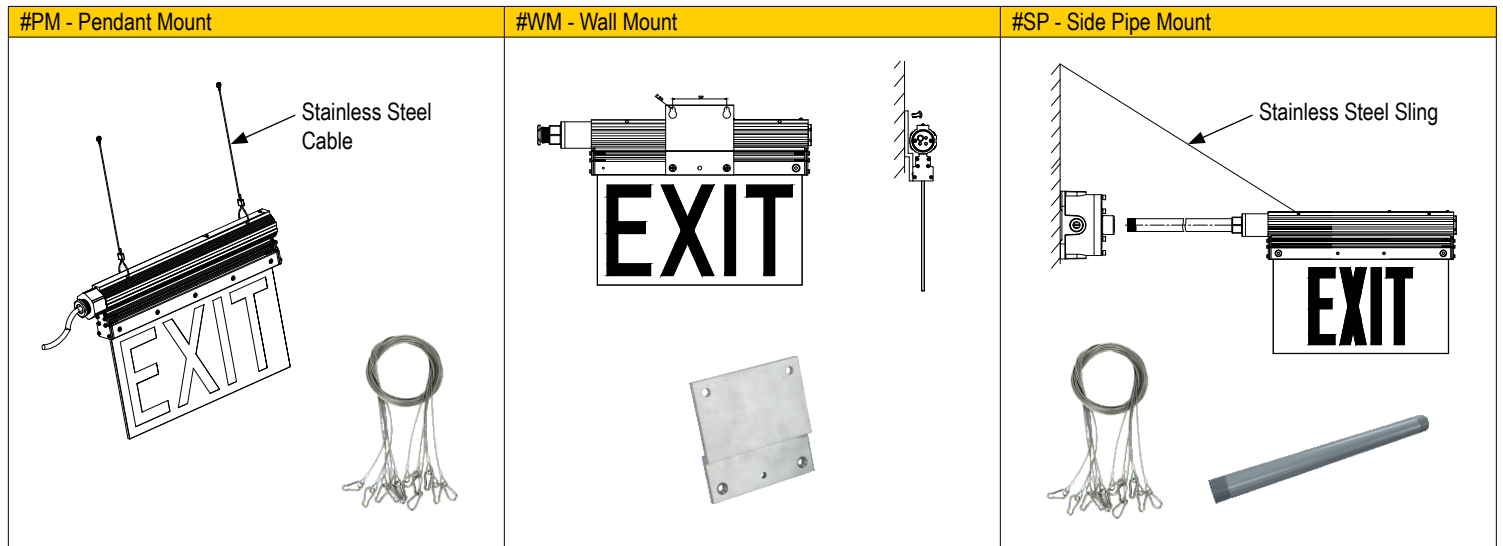

WEIGHTS AND DIMENSIONS

Weight
7.28 lb

