RCWLUE Series

Emergency Lighting

LED

SOLAS RAY™ LIGHTING

5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS

c UL us LISTED

UL924

NFPA 101

KEY FEATURES AND BENEFITS

- Sealed and gasketed weatherproof lamp heads with high performance chrome-plated metalized reflector and tempered glass lenses for optimal light distribution.
- Long lasting efficient ultra bright white LED lamp heads.
- 1.875W (15 LEDs x 0.125) per head.

SPECIFICATIONS

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 3.7W standard in operating temperatures of 0°C – 50°C.

HOUSING

- Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in gray or black finish.
- Sealed and gasketed housing with hinged cover.
- Sealed test switch.

MOUNTING

- External mounting brackets for simplified wall mounting.
- Knockout for conduit applications.

OPTIONS

- CEC: Certified to CEC under Title 20 Regulations.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA,
- Local and State Codes.
- UL Listed for wet locations (-20°C to 50°C)

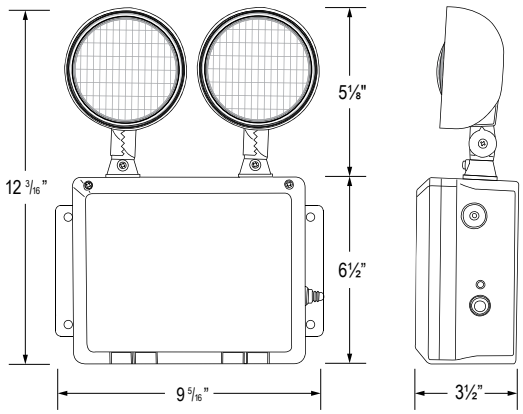

PRODUCT ORDERING SELECTION

RCWLUE	–		–	
Series		**Housing Color**		**Options**
☑ RCWLUE		☐ Blank - Gray		☐ CEC - Title 20 Compliance
		☐ B - Black		

Specifications and data are subject to change without notice.