RBHL Series

The RANGER™

LED Emergency Remote Head

SOLAS RAY™ LIGHTING
5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

Cat. #	Type
Notes	

Compatible with the Solas Ray CESNN and RCWLUE series emergency lights

CERTIFICATIONS / RATINGS

c UL us LISTED | UL924 | NFPA 101

KEY FEATURES AND BENEFITS

- Remote heads designed for use as part of an emergency lighting system in indoor and outdoor applications.
- 1 or 2 LED Heads - 1.5W each.
- Powered by low voltage source (3.6V / 6V / 9.6V / 12V DC).
- UL listed for wet locations.

SPECIFICATIONS

ELECTRICAL

- Powered from external power source, (3.6V, 6V, 9.6V, or 12V), with low voltage wiring (not provided)

HOUSING

- Engineering grade, high-impact resistant polycarbonate in gray or black finish.

LISTING & RATINGS

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations.
- -30°C (-22°F) to 50°C (122°F).

MOUNTING

- Universal mounting adapter plate included with mounting hardware.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

LED / OPTICS

- Adjustable long lasting and efficient 1.5 watt, (12 LEDs x 0.125 watt per head)
- Ultra-bright white LED lamp heads.
- High performance chrome-plated metalized reflector and plastic lens provides optimal light distribution and center-to-center spacing.

WARRANTY / LISTING

- Five year limited warranty.

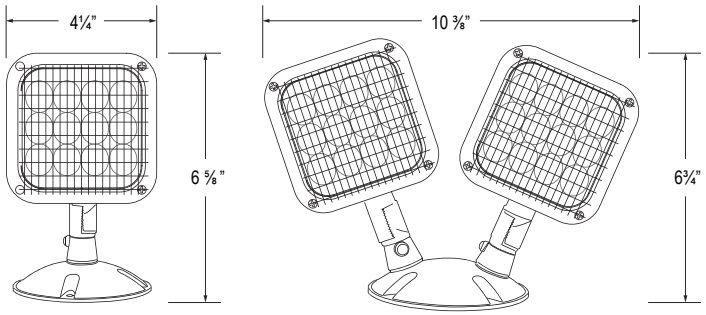

PRODUCT ORDERING SELECTION

RBHL	–		–		–	MV	–		–	HL

Series	Heads	Housing	Voltage	Housing Color	Lamp Type
☑ RBHL	☐ 1 - Single Head ☐ 2 - Double Head	☐ PWP - Thermoplastic ☐ WP - Die-Cast	☑ MV - 3.6V / 6V / 9.6V / 12V DC	☐ G - Gray ☐ B - Black	☑ HL - 12 LED / 1.5W

Specifications and data are subject to change without notice.