

BQRS Series

Square Reveal Designer Bollards
LED Outdoor Lighting



| | |
|--------|------|
| Cat. # | Type |
| Notes | |

CERTIFICATIONS / RATINGS



IP66

CERTIFIED
UL 1598

UL 8750
LED SAFETY

KEY FEATURES AND BENEFITS

This durable LED Bollard is designed to provide uniform ambient lighting while accenting any landscape. This square bollard with a flat top provides low glare and cost-effective pathway lighting for any location.

Solas Ray™ Designer Bollards become the featured addition to illuminate and accent landscaping, walkways, buildings, hospitals, office buildings, schools and parking areas. Anywhere security, visibility and safety is needed, ask for quality, demand performance and expect reliability from Solas Ray bollards.

- Includes mounting kit with 8" anchor bolts.
- Custom heights and colors are available upon request.
- 0-10V dimming driver.
- Buy American Act compliant.



**Universal Retrofit
Base Kit**

Part Number: BRK

SPECIFICATIONS

| | |
|----------------------------|---|
| Voltage | 120-277 VAC |
| Wattage | 16W / 25W |
| Color Temp | 3000 / 4000 / 5000 Kelvin |
| Housing | Extruded aluminum housing with sealed driver compartment. |
| Finish | Powder-coat finish over chromate conversion coating. |
| Color | Architectural bronze / black / custom |
| Lens | Clear UV-stabilized polycarbonate |
| Lifetime | 187,000 hrs L70 (@ 25°C/77°F) |
| Ambient Temperature | -40°C (-40°F) to 50°C (122°F) |
| Protection | IP66 |
| Warranty | 5 Year Limited Warranty |

LUMENS

| Kelvin | 16W | 25W |
|--------|----------|----------|
| 3000K | 1,604 lm | 2,406 lm |
| 4000K | 1,740 lm | 2,610 lm |
| 5000K | 1,813 lm | 2,719 lm |

WEIGHT, DIMENSIONS AND BUG RATING


WEIGHT

20 lb.

Custom heights
available upon request.

BUG (Backlight / Uplight / Glare)

| Wattage | B (Back) | U (Up) | G (Glare) |
|---------|----------|--------|-----------|
| 16W | 1 | 2 | 1 |
| 25W | 1 | 3 | 1 |

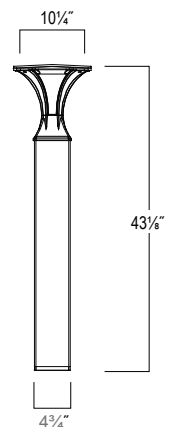

PRODUCT ORDERING SELECTION

| | | | | | | |
|--|--|---|---|--|--|--|
| BQRS | | | CA | U | | |
| Series | Watts | Kelvin | Lens | Voltage | Body Color | Options / Accessories |
| <input checked="" type="checkbox"/> BQRS | <input type="checkbox"/> 016 - 16W <input type="checkbox"/> 025 - 25W | <input type="checkbox"/> 30 - 3000K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K | <input type="checkbox"/> CA - Clear Array | <input checked="" type="checkbox"/> U - 120-277VAC | <input type="checkbox"/> Z - Bronze <input type="checkbox"/> B - Black <input type="checkbox"/> C - Custom | <input type="checkbox"/> SF - Single Fuse <input type="checkbox"/> DF - Double Fuse <input type="checkbox"/> SP - Surge Protection <input type="checkbox"/> GF1 - GFCI Outlet 15A, 120V <input type="checkbox"/> BRK - Universal Retrofit Base Kit |