


HQT Series

The TROOPER™

Hazardous Location LED Lighting



Adjustable Yoke
Included Standard



5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



UL844

CLASS / DIVISION

- Class I, Div 2, Groups A, B, C, D

KEY FEATURES AND BENEFITS


- Ambient temperature capabilities -25°C (-13°F) to 50°C (122°F).
- Corrosion proof - coated aluminum alloy housing.
- Gray nylon corrosion resistant powder coat finish.
- Steel adjustable yoke (standard).
- Stainless steel close-up plugs for wiring entrance conduits and fittings.
- High vibration resistance.
- 0-10V dimmable (standard).
- 6kV surge protection standard, 20kV protection available.
- Suitable for wet locations.
- Buy American Act (BAA) compliant.

SPECIFICATIONS

Voltage	120-277 VAC
Wattage	140W
Lumens	15,046 lm
Color Temp	5000 Kelvin
Housing	Coated die cast aluminum
Color	Gray
Lens	Tempered glass
Ambient Temperature	-25°C (-13°F) to 50°C (122°F)
T-Rating	T4
Lifetime	>100,000 hrs L80
CRI	80
Beam Angles	110° (NEMA 7H x 7V)
Power Factor	>0.90
Warranty	5 Year Limited Warranty

WEIGHTS AND DIMENSIONS

Weight
22 lb

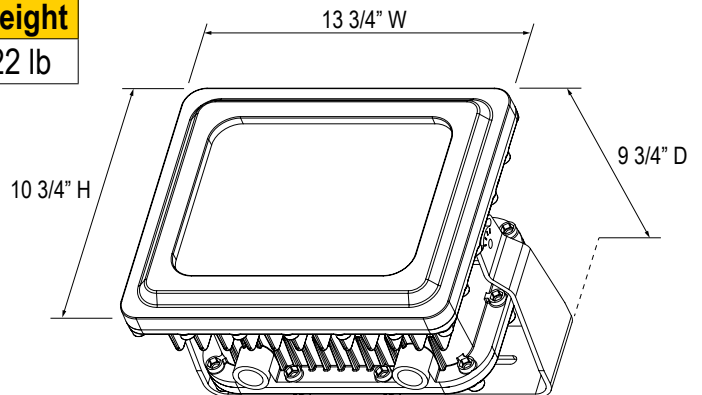

PRODUCT ORDERING SELECTION

HQT	140	50	U	110	
Series	Watts	Kelvin	Voltage	Beam Angle	Options
<input checked="" type="checkbox"/> HQT	<input checked="" type="checkbox"/> 140 - 140W	<input checked="" type="checkbox"/> 50 - 5000K	<input checked="" type="checkbox"/> U - 120-277 VAC	<input checked="" type="checkbox"/> 110 - 110°	<input type="checkbox"/> SP - 20kV Surge Protection