

WWC Series

WALL PACK

Heavy Duty Full Cut-Off

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



KEY FEATURES AND BENEFITS

- Field adjustable wattage 30W / 45W / 60W / 70W.
- Field adjustable color temperature 3000K / 4000K / 5000K.
- Photocell included standard - comes with cover for non-photocell operation.
- Excellent optics for greatly improved light utilization and even distribution.
- High efficiency LED (up to 130 lm/w).
- Long life (75,000 hrs).
- 1-10V dimming.



SPECIFICATIONS

Voltage	120-277 VAC
Wattage	Selectable 30W / 45W / 60W / 70W
Lumens	Selectable (see chart)
Color Temp	Selectable 3000 / 4000 / 5000 Kelvin
Housing	Cast aluminum
Lens	Polycarbonate
Efficacy	Up to 130 lm/w
CRI	70
Power Factor	0.95
Driver Efficacy	90%
Beam Angle	82° x 102°
Life Span	75,000 hrs
Ambient Temperature	-30°C (-22°F) to 45°C (113°F)
Warranty	5 Year Limited Warranty

LUMENS

Setting	30W	45W	60W	70W
Lumens	4,216	6,139	7,882	8,980



Wattage and color temp. controls.


Included photocell



Included photocell cover



WEIGHTS AND DIMENSIONS

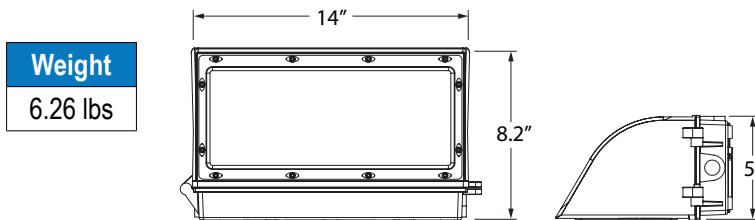

PRODUCT ORDERING SELECTION

WWC	-	34567	-	345K	-	U	-	Z	-	P	-	
Series		Watts		Kelvin		Voltage		Body Color		Photocell		Optional Emergency Backup
<input checked="" type="checkbox"/> WWC		<input checked="" type="checkbox"/> 34567 - Selectable (30W / 45W / 60W / 70W)		<input checked="" type="checkbox"/> 345K - Selectable (3000K / 4000K / 5000K)		<input checked="" type="checkbox"/> U - 120-277 VAC		<input checked="" type="checkbox"/> Z - Bronze		<input checked="" type="checkbox"/> P - Photocell (standard)		<input type="checkbox"/> BLD-8 - 8W Emergency Backup <input type="checkbox"/> BLD-15 - 15W Emergency Backup