

WWP Series

WALL PACK

Heavy Duty Semi Cut-Off



5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



KEY FEATURES AND BENEFITS

- Field adjustable wattage 30w / 50w / 60w / 70w.
- Field adjustable color temperature 3000K / 4000K / 5000K.
- Photocell included standard - comes with cover for non-photocell operation.
- Excellent optics for greatly improved light utilization and even distribution.
- High efficiency LED (up to 129 lm/w).
- Long life (75,000 hrs).
- 1-10V dimming.



SPECIFICATIONS


Voltage	120-277vAC
Wattage	Selectable 30w / 50w / 60w / 70w
Lumens	Selectable (see chart)
Color Temp	Selectable 3000 / 4000 / 5000 Kelvin
Housing	Cast aluminum
Lens	Glass
Efficacy	Up to 129 lm/w
CRI	70
Power Factor	0.95
Driver Efficacy	90%
Beam Angle	87° x 118°
Life Span	75,000 hrs
Ambient Temperature	-30°C (-22°F) to 45°C (113°F)
Warranty	5 Year Limited Warranty

LUMENS

Setting	30w	50w	60w	70w
Lumens	4,368	6,821	8,047	9,032



Wattage and color temp. controls.


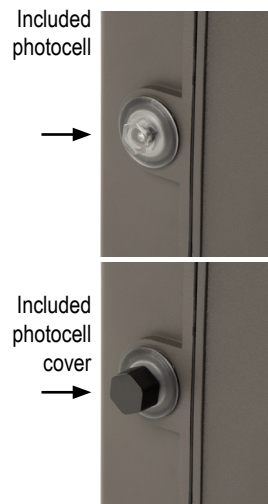


Included photocell

Included photocell cover

WEIGHTS AND DIMENSIONS

Weight
10.4 lbs

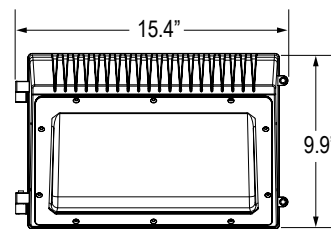

PRODUCT ORDERING SELECTION

WWP	-	3567	-	345K	-	U	-	Z	-	P	-	
Series		Watts		Kelvin		Voltage		Body Color		Photocell		Optional Emergency Backup
<input checked="" type="checkbox"/> WWP		<input checked="" type="checkbox"/> 3567 - Selectable (30w / 50w / 60w / 70w)		<input checked="" type="checkbox"/> 345K - Selectable (3000K / 4000K / 5000K)		<input checked="" type="checkbox"/> U - 120-277 vAC		<input checked="" type="checkbox"/> Z - Bronze		<input checked="" type="checkbox"/> P - Photocell (standard)		<input type="checkbox"/> BLD-8 - 8W Emergency Backup <input type="checkbox"/> BLD-15 - 15W Emergency Backup