

BQSO/BQRO Series

Wide Flat Top Designer Bollards LED Outdoor Lighting



Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



KEY FEATURES AND BENEFITS

These uniquely stylized LED Bollards are designed using LED technology and produced to provide uniform lighting while accenting any landscape. They provide low glare and highly cost-effective pathway lighting.

Solas Ray™ Designer Bollards become the featured addition to illuminate and accent landscaping, walkways, buildings, hospitals, office buildings, schools and parking areas. Anywhere security, visibility and safety is needed, ask for quality, demand performance and expect reliability from Solas Ray bollards.

- Includes mounting kit with 8" anchor bolts.
- Custom heights and colors are available upon request.
- 0-10V dimming driver.
- Buy American Act compliant.



Universal Retrofit Base Kit
Part Number: BRK

SPECIFICATIONS

Voltage	120-277 VAC
Wattage	16W / 23W / 34W
Color Temp	3000 / 4000 Kelvin
Housing	Extruded aluminum housing with vandal-resistant hardware.
Finish	Powder-coat finish over chromate conversion coating.
Color	Architectural bronze / black / custom
Lens	Clear UV-stabilized polycarbonate
Lifetime	187,000 hrs L70 (@ 25°C/77°F)
Ambient Temperature	-20°C (-4°F) to +40°C (104°F)
Protection	IP66
Warranty	5 Year Limited Warranty

LUMENS


Series	Kelvin	16W	23W	34W
BQSO (Square)	3000K	1,432 lm	2,005 lm	3,008 lm
	4000K	1,554 lm	2,175 lm	3,263 lm
BQRO (Round)	3000K	1,406 lm	1,968 lm	2,952 lm
	4000K	1,525 lm	2,135 lm	3,202 lm

WEIGHT, DIMENSIONS AND BUG RATING

WEIGHT

16 lb.

Custom heights available upon request.

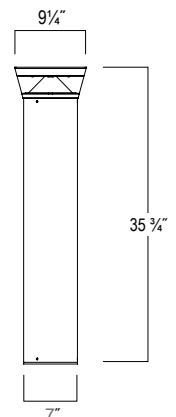

BUG (Backlight / Uplight / Glare)

Series	Wattage	B (Back)	U (Up)	G (Glare)
BQSO (Square)	16W	1	3	1
	25W	1	3	1
	34W	1	4	2
BQRO (Round)	16W	1	3	1
	25W	1	3	1
	34W	1	3	1

PRODUCT ORDERING SELECTION

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	PC	U	<input type="checkbox"/>	<input type="checkbox"/>
Series	Watts	Kelvin	Lens	Voltage	Body Color	Options / Accessories
<input type="checkbox"/> BQSO (Square)	<input type="checkbox"/> 016 - 16W	<input type="checkbox"/> 30 - 3000K	<input type="checkbox"/> PC - Polycarbonate	<input checked="" type="checkbox"/> U - 120-277VAC	<input type="checkbox"/> Z - Bronze	<input type="checkbox"/> SF - Single Fuse
<input type="checkbox"/> BQRO (Round)	<input type="checkbox"/> 025 - 25W	<input type="checkbox"/> 40 - 4000K			<input type="checkbox"/> B - Black	<input type="checkbox"/> DF - Double Fuse
	<input type="checkbox"/> 034 - 34W				<input type="checkbox"/> C - Custom	<input type="checkbox"/> SP - Surge Protection
						<input type="checkbox"/> GF1 - GFCI Outlet 15A, 120V
						<input type="checkbox"/> BRK - Universal Retrofit Base Kit